

## SE-A315J




- Rotatable spring Anti-Vibration design
- Metal painted Leak-Free acoustic housing
- Hanging brackets ensure more safety and no swing after installation
- High density acoustic foam
- Certified: CE,UKCA,ETL,SAA,PSE,G-mark

## GENERAL DATA


Model	SE-A315J
Fan Size	12inch/315mm
Net Weight	21KG
Rated Voltage	110~120VAC/220~240VAC
Max. Power C	260W 320W
Frequency	50/60Hz
Max. Speed	2800RPM 3000RPM
Max. Airflow	1639CFM/2787M <sup>3</sup> H 1757CFM/2987M <sup>3</sup> H
Max. Static P	61mmH <sup>2</sup> O/598Pa 69mmH <sup>2</sup> O/677Pa
Max.Noise L	66dBA 68dBA
IP Rating	IP65
Housing	Painted Metal
Motor Type	EC Motor

# PQ Curve

Name	Value	Unit
Volume flow	2787/2987	M <sup>3</sup> /H
Pressure	598/677	Pa

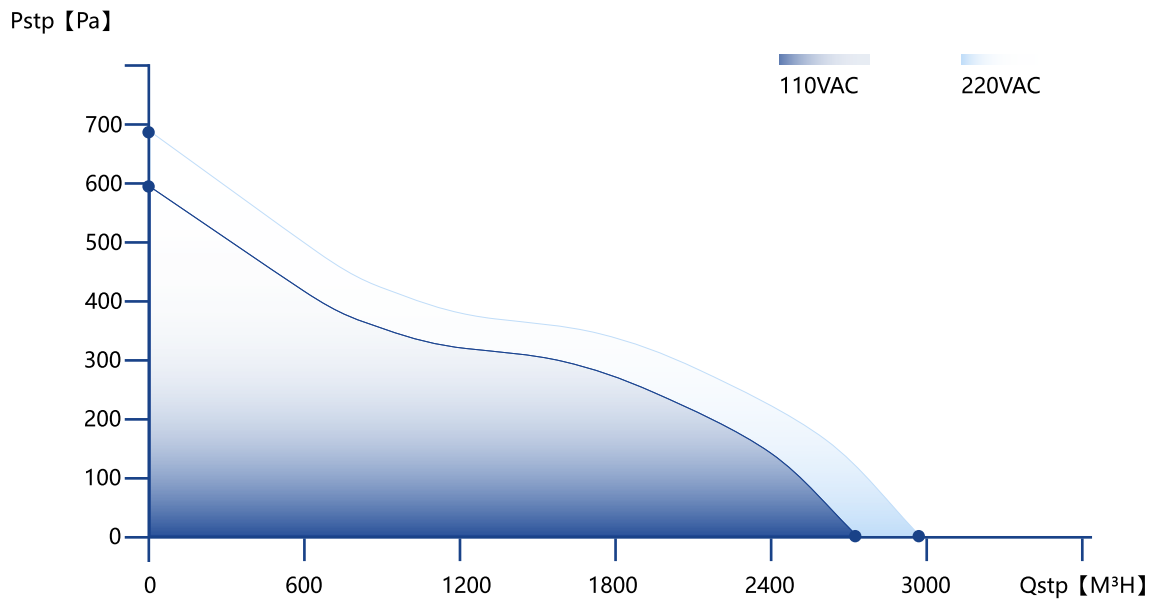


# DIMENSION DRAWING

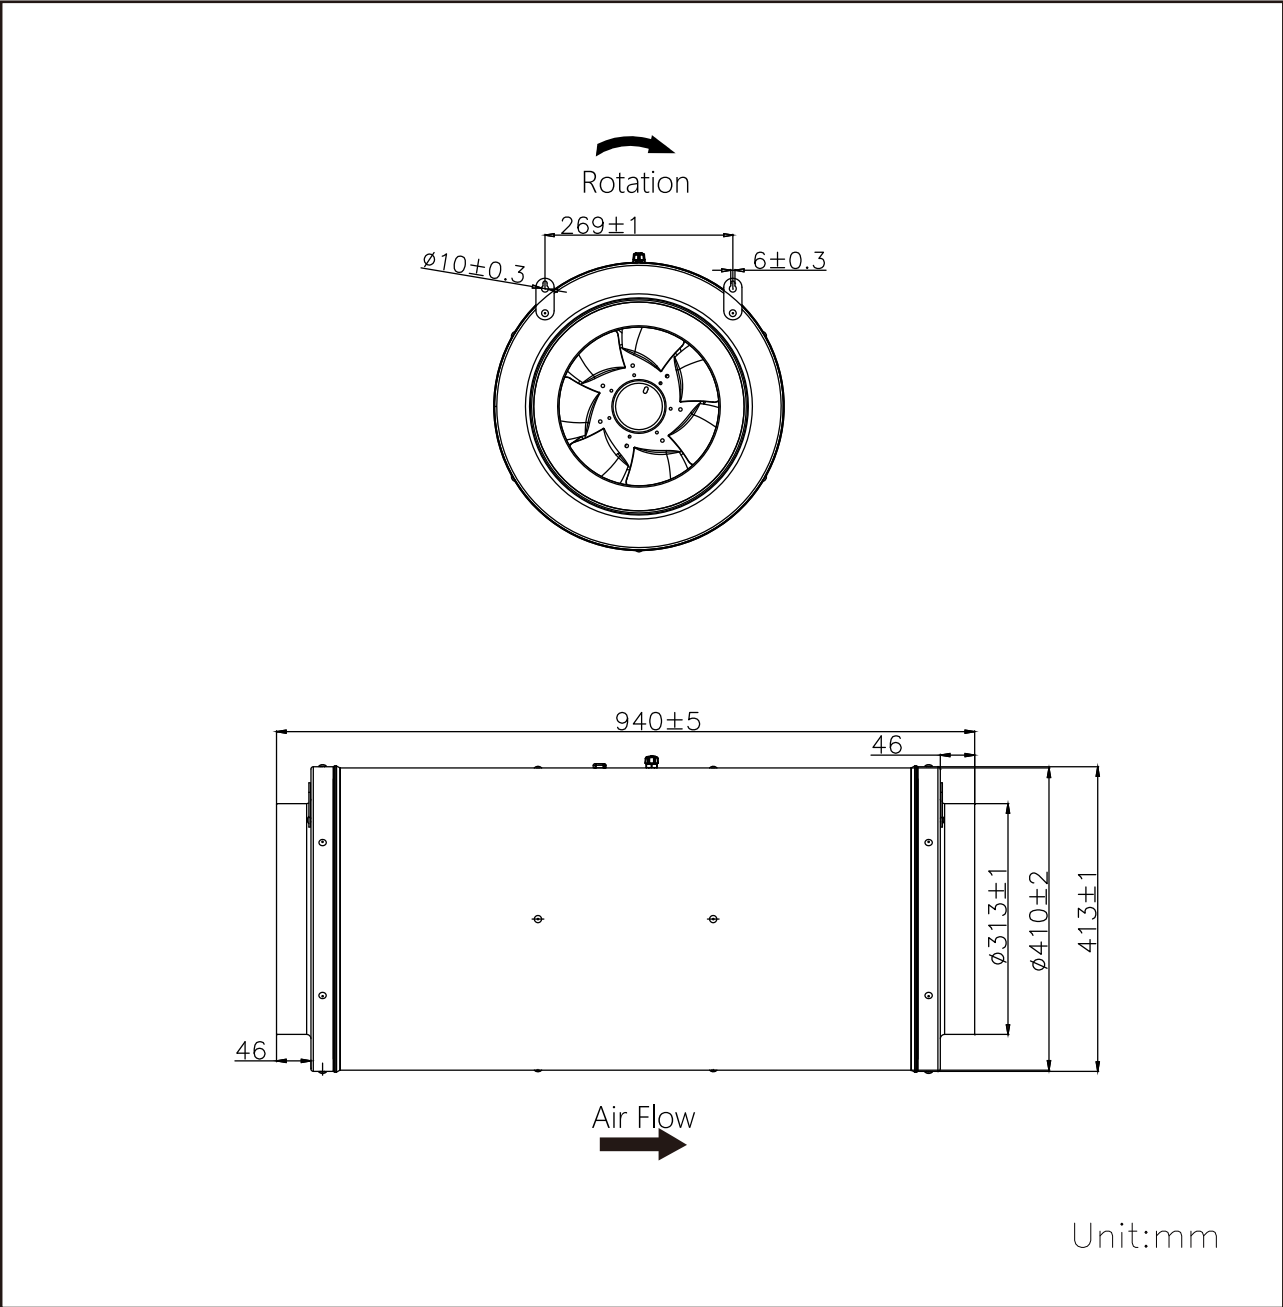


# DIY 4-PINS CONTROL


EC fan with Multiple Speed Control Signals is packed with a DIY 4 pins connection cable, please refer to the diagram below.

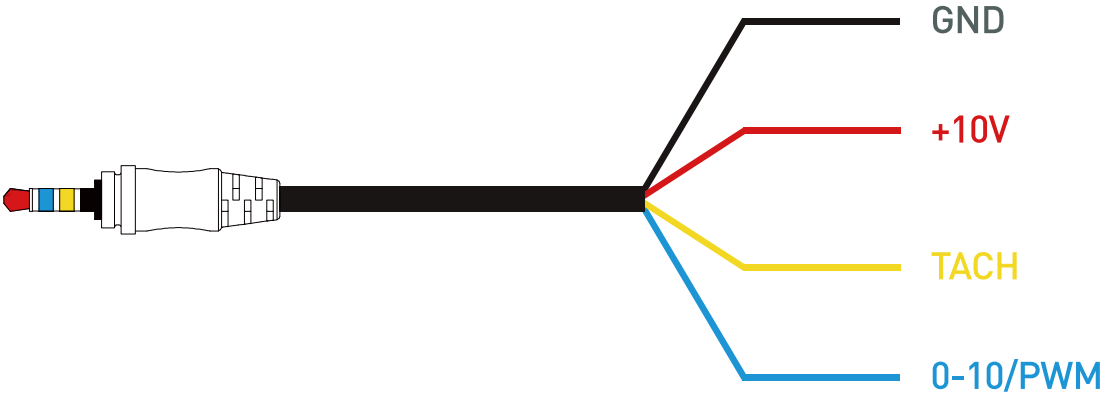


**Speed Control via 0-10V**



**Max.Speed**



**Speed Control via PWM**



**Speed Control via POT**



# ACCESSORIES

■ Smart EC fan controller pro



■ Temperature controller




■ Wall mounted controller



■ Wireless remote with receiver



■ Wall mounted controller (US)

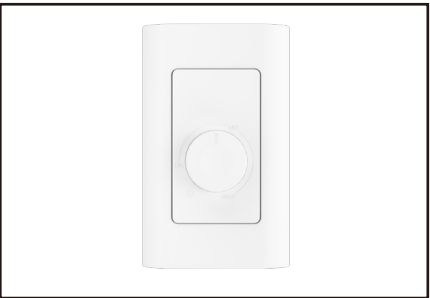

■ Varibale speed controller



■ Extension Control cable



■ DIY Speed Control Cable



■ 3 Pins Controller Adaptor




■ RJ45 Controller Adaptor



# HANG INSTALLATION

1. Mark the screw position on the wall

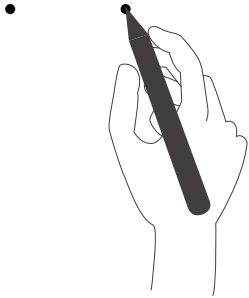


2. Punch holes in the wall




3. Tighten the hook



4. Hook the lug on the fan

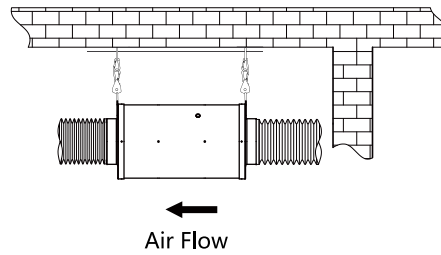

5. Connect the speed control to the fan and make sure the connection is in place and fastened

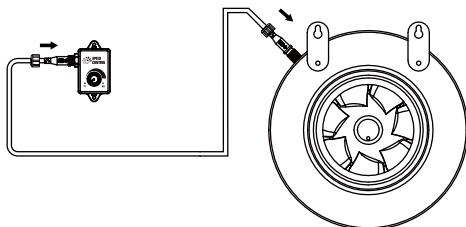

6. Power up the fan

